



16 Channel PoE+ Network Video Recorder

MODEL: VIGI NVR2016H-16MP



H.265+

16 PoE+ Ports | **140W** PoE Budget

4K HDMI Output

Provides Finer Details and Crystal Clarity

Quick Playback

16-Channel Synchronous Playback*

2 SATA Interfaces

Up to 16 TB Capability for Each HDD**

Remote Management

Dedicated VIGI app and PC Client

ONVIF

Comprehensive Compatibility

Overview

VIGI Surveillance Solution

The VIGI network video recorder coordinates with camera systems to help you view, store, and play back videos.

Highlight



16-Channel Live View

Display each surveilled zone in real-time on a single interface for comprehensive control.



16x PoE+ Ports for Simple Deployment

Easily connect and power your PoE camera with one RJ45 cable transmitting both data and power.



4K HDMI Output

Show more details with up to 8MP resolution for one channel and 20MP decoding capacity in total for all channels.



Remote Management

Take full control over your security anytime and anywhere on the VIGI app or PC client.



Practical Playback


Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.



Non-Stop Recording

Stores up to 32 TB of footage from connected cameras to secure your data for quick and convenient access.

Network Topology

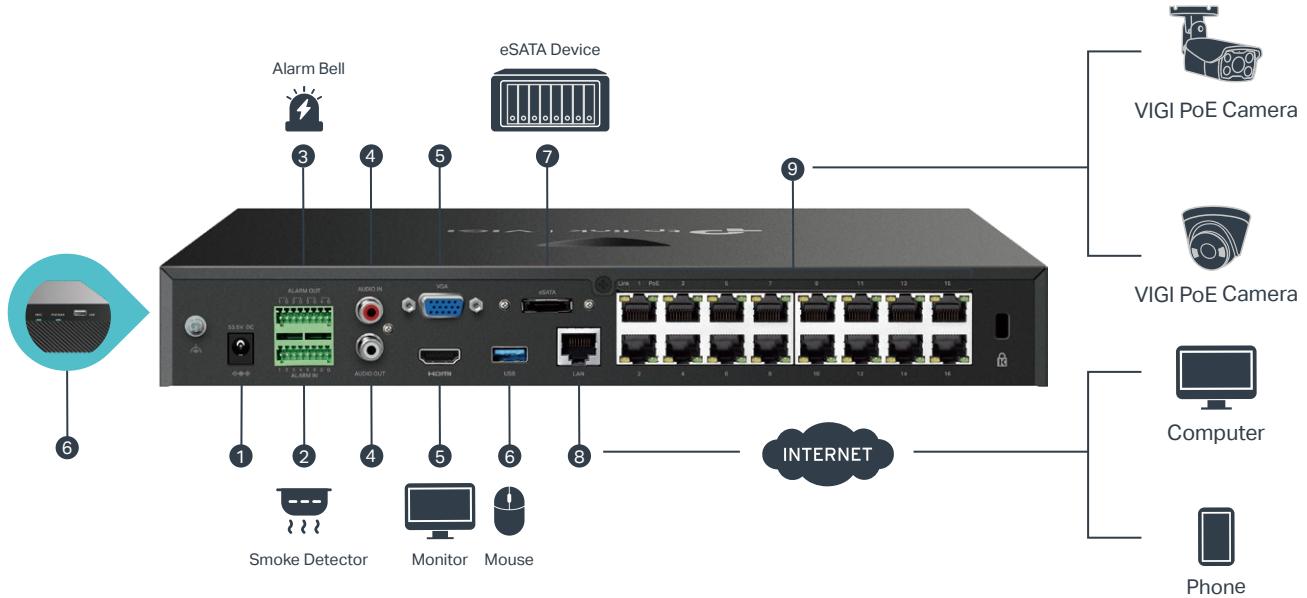

[†]HDD is not included.

[‡]Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

[§]A hard disk drive (not included) must be installed for operation.

Specifications are subject to change without notice.

©2024 TP-Link

Specifications

NVR	
Product Model	VIGI NVR2016H-16MP
Video and Audio	
IP Video Input	16-Channel
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	320 Mbps
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
Video Output Mode	HDMI and VGA Independent / Simultaneous Output
Multi-View Display	1/4/6/8/9/16
Decoding	
Audio Compression	G.711A/G.711U/G.726
Video Compression	H.265+/H.265/ H.264+/H.264
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-Channel†
Capability	<ul style="list-style-type: none"> • 25fps: 10-ch @ 3MP, 16-ch @ 1080P • 30fps: 4-ch @ 8MP, 6-ch @ 5MP, 8-ch @ 4MP
Record Management	
Record Mode	<ul style="list-style-type: none"> • Manual Recording • Scheduling Recording • Motion Detection Recording
Playback Mode	<ul style="list-style-type: none"> • Instant Playback • Regular Playback • Tag Playback • Event Playback
Backup Mode	<ul style="list-style-type: none"> • Regular Backup • Video Clip Backup

Playback Function	<ul style="list-style-type: none"> • Play • Pause • Stop • Fast Forward • Fast Backward • Play By Frame • Full Screen • Video Clip • Export Clip • Digital Zoom • Lock Recording • Audio On/Off
Network	
Network Protocols	UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP, FTP/SFTP, IPv6, SNMP
Interoperability	ONVIF Profile S/T, CGI
Mobile Phone Access	Android, iOS
Browser	Chrome (57+), Firefox (52+), Edge (91+), Safari (11+)
PoE	
Interface	1-16, RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
Power	140 [△] W Available for All PoE+ Ports, 30 W Max per Port
Standard	802.3at/af Compliant
Auxiliary Interface	
Network Interface	1, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface
USB Interface	1 Front USB 2.0 Port, 1 Rear USB 3.0 Port
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	6/4
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	1*
HDMI	1
VGA	1
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 16 TB Capacity for Each HDD*

Alarm	
General Alarm	<ul style="list-style-type: none"> • Motion Detection • Video Tampering • Scene Change Detection • Line-Crossing Detection • Intrusion Detection • Region Entering Detection • Region Exiting Detection • Loitering Detection • Object Abandoned/Removal Detection • Vehicle Detection • Human Detection • Abnormal Sound Detection • Smart Frame <p>Note: The alarm function requires the use of a camera.</p>
Anomaly Alarm	<ul style="list-style-type: none"> • Video Loss • Offline and IP Conflict • Disk Exception • Login Exception • Fan Exception
Alarm Linkage	<ul style="list-style-type: none"> • Recording • White Light Alarm • Buzzer • Log • Audible Alarm <p>Note: The alarm function requires the use of a camera.</p>
General	
Package Contents	<ul style="list-style-type: none"> • VIGI Network Video Recorder • Power Adapter • Terminal Blocks • HDD Power Cables • HDD Data Cables • Mounting Brackets • Screws • Rubber Feet • Mouse • Quick Installation Guide
Power Supply	DC 53.5V/3.37A
Max Power Consumption	<ul style="list-style-type: none"> • 6.2 W (Without Disk) • 40 W (With Disk)
Working Temperature	<ul style="list-style-type: none"> • NVR: -10 °C to 55 °C (14 °F to 131 °F) • Power Adapter: 0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Working Humidity	10%~90% RH Non-Condensing
Storage Humidity	10%~90% RH Non-Condensing
Product Dimensions (W × D × H)	13.0 × 11.2 × 1.8 in (330 × 285 × 45 mm)
Net Weight	2.2 Kg [#]
Gross Weight	4.2 Kg [#]
Certification	CE, NTRA, BSMI, VCCI, FCC, HDMI, ONVIF

Build Features



*HDD is not included.

[△]Calculations are based on laboratory testing. Actual data is not guaranteed and will vary as a result of client limitations and environmental factors.

*A hard disk drive (not included) must be installed for operation.

[†]The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 32MP.

[#]Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.